

Outlets VDL 500/VDL 600

- The outlet with stainless steel multiphase slide is used to convey more types of feed with one feedingsystem. (piglets/fatteners)
- As single outlets, they can be used in combination with dispensers, Y-pieces or telescopic droptubes.

Stainless steel entryhopper

- With inspection window and hatch
- Adjustable slide for feedlevel regulation
- For single or double circuit (50 and/or 60 mm)
- Suitable for installation under silo

MFD en MFD-Eco controlpanels

- Specially designed for systems VDL500 and VDL600
- PLC controlled
- Equipped with thermic protection and cable rupture security


Multi Phase feeding Mix-O-Matic

- Reliable and user friendly system
- Easy to install
- When using the Mix-O-Matic multiphase computer system, with each single pneumatic outlet and Y shaped diverter 2 feeders can be filled.

Drive unit

- For tube feeding systems with diameter 50 mm (VDL500) and 60 mm (VDL600)
- Available for chain disc or cable disc conveyor
- Made of stainless steel
- Including cable tensioning wheel and sensor for cable rupture detection


Outlet

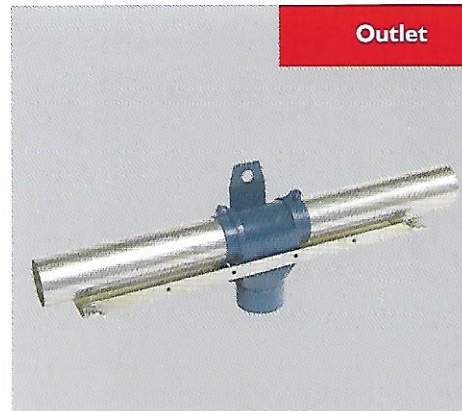

Stainless steel entryhopper



Pneumatic Outlet

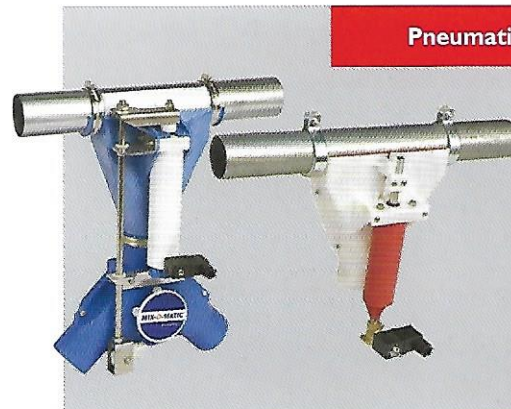

Drive unit

